

DECLARATION OF PERFORMANCE

Optimast 127

PASSIVE SAFE MAST

NO. 001-127-2015.01.22



SignPost SOLUTIONS LTD

Unit 5, Clarendon Drive, The Parkway

Tipton DY4 0QA, United Kingdom

Tel: +44 (0) 121 506 4770

Fax: +44 (0) 121 506 4771

www.signfix.co.uk

SignPost
SOLUTIONS LTD



FM13394



EMS54108

Declaration of Performance

No. 001-127-2015.01.22

OPTIMAST 127 passive safe mast Revision B

Product name

Optimast 127

Product specifications

The mast is delivered complete with cap and base plate

Tested and approved EN 12767:2007 100, NE, 3

Report and Test no.: 1033700-001 Rev2 L0057

1033700-002 Rev2 L0058

Product no.: OPTI127X3500

Optimast 127°D X 3500 C/W fitted cap & base plate

(Stock lengths) OPTI127X4000

Optimast 127°D X 4000 C/W fitted cap & baseplate

OPTI127X5000

Optimast 127°D X 5000 C/W fitted cap & baseplate

Material / Surface treatment

Mast: Aluminium 6063 T66, class SP2


Base plate: Steel S355J2+N, galvanized to ISO 1461

Bolts: BUMAX 109 (A4 – 316 stainless steel)

Data / Weight

Mast, Diameter [mm]	Mast, Length max [mm]	Mast, Length min, ground to bottom of sign* [mm]	Min C-C with 1,5m opening at 20° angle [mm]	Bolts base plate/ mast	Mast Weight [kg / m]	Base Plate Thickness [mm]	Base Plate Dimension [mm]	Base Plate Weight [kg]	Bolt patterns for foundation [mm]	Bolts base plate/ foundation
127	5000	1800	1731	M14	4,7	25	200 x 200	7,0	150x150	M16

*) For an Optimast to be passive safe in accordance to EN 12767 the length from ground level to the bottom of the sign should be minimum 1800mm. The overall length depends on the sign chosen.

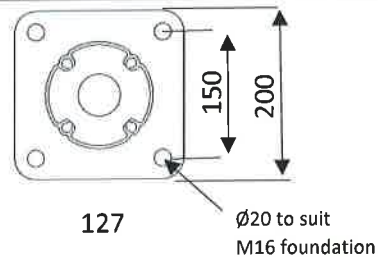

SignPost SOLUTIONS LTD

Unit 5, Clarendon Drive, The Parkway
Tipton DY4 0QA, United Kingdom
Tel: +44 (0) 121 506 4770
Fax: +44 (0) 121 506 4771
www.signfix.co.uk



FM13394

EMS54108

Declaration of Performance

No. 001-127-2015.01.22

OPTIMAST 127 passive safe mast Revision B

Capacity

Bending Capacity** $M_{bmax} (M_u)$	Torsion Capacity** $M_{tmax} (T_u)$	Bending Stiffness EI	Torsion Stiffness GI
11,1 kNm	5,1 kNm	204 kNm ²	40 kNm ²

**) The moments do not take into account the partial material factor (γ_m). EN 12899-1 gives a γ_m for aluminium of 1,15

Maintenance

No maintenance required.

CE marking and system of assessment and verification of constancy of performance

CE marked according to EN 12899-1:2007

Notified body no. 0086

See attached certificate


System of assessment and verification of constancy of performance:
System 1

CE marking is approved and valid for minimum 1800mm from ground to bottom of sign to full length of 5000mm; see Section Data/Weight

The CE label gives all important information on data and capacity. Within the manufacturing process masts and base plates are marked for traceability.

Referrals

EC Certificate of conformity No. 0086-CPR-572169.

 0086
SignPost Solutions Unit 5, Clarendon Drive The Parkway, Tipton, DY4 0QA United Kingdom www.signfix.co.uk 13 001 - 127 - 2015.01.22
Optimast 127 EN 12899-1:2007 M_b 11,1 kNm (M_u) EI 204 kNm ² M_t 5,1 kNm (T_u) GI 40 kNm ² EN12767:2007 100, NE, 3
<i>Declaration of Performance, DoP:</i> www.signfix.co.uk/optimast-dop

SignPost SOLUTIONS LTD
Unit 5, Clarendon Drive, The Parkway
Tipton DY4 0QA, United Kingdom
Tel: +44 (0) 121 506 4770
Fax: +44 (0) 121 506 4771
www.signfix.co.uk



FM13394

EMS54108

Declaration of Performance

No. 001-127-2015.01.22

OPTIMAST 127 passive safe mast Revision B

Approved by the manufacturer

For Optimast Installation Method please use link below:

<http://www.signfix.co.uk/wp-content/uploads/2014/08/Optimast-Installation-Method-Statement-Issued-August-2017.pdf>



Chris Nicklin
Managing Director

03.11.2017

SignPost SOLUTIONS LTD
Unit 5, Clarendon Drive, The Parkway
Tipton DY4 0QA, United Kingdom

Revision History

Revision	Reason for Revision	Date
A	Removed installation page & added link to Installation method.	22/09/17
B	Certificate of conformity no. changed	16/10/17

SignPost SOLUTIONS LTD
Unit 5, Clarendon Drive, The Parkway
Tipton DY4 0QA, United Kingdom
Tel: +44 (0) 121 506 4770
Fax: +44 (0) 121 506 4771
www.signfix.co.uk



FM13394



EMS54108